

Material:

Shielding: Copper alloy with nickel plating






Insert: NY-46, UL 94-V0, black

Contact: -Alloy, C5210, selective gold plating

over nickel in contact area

- Tin plating over nickel in solder area

PCB layout, component side

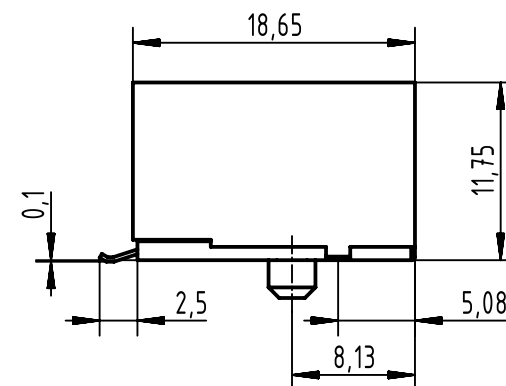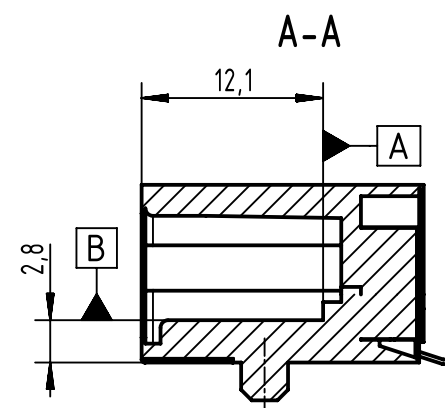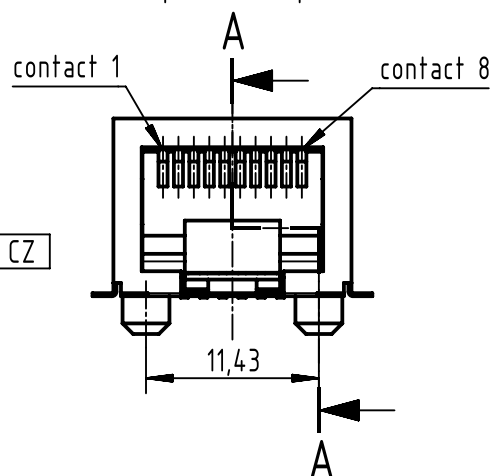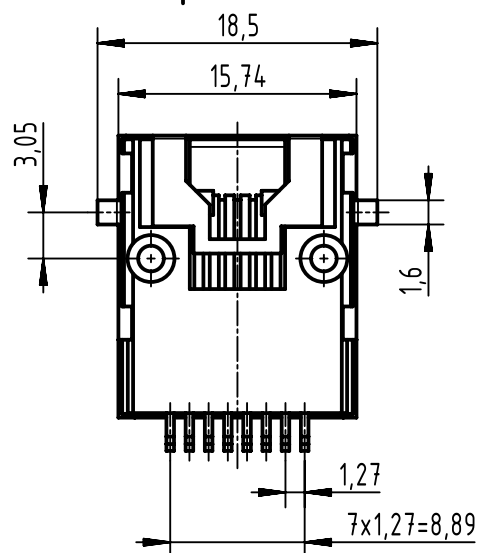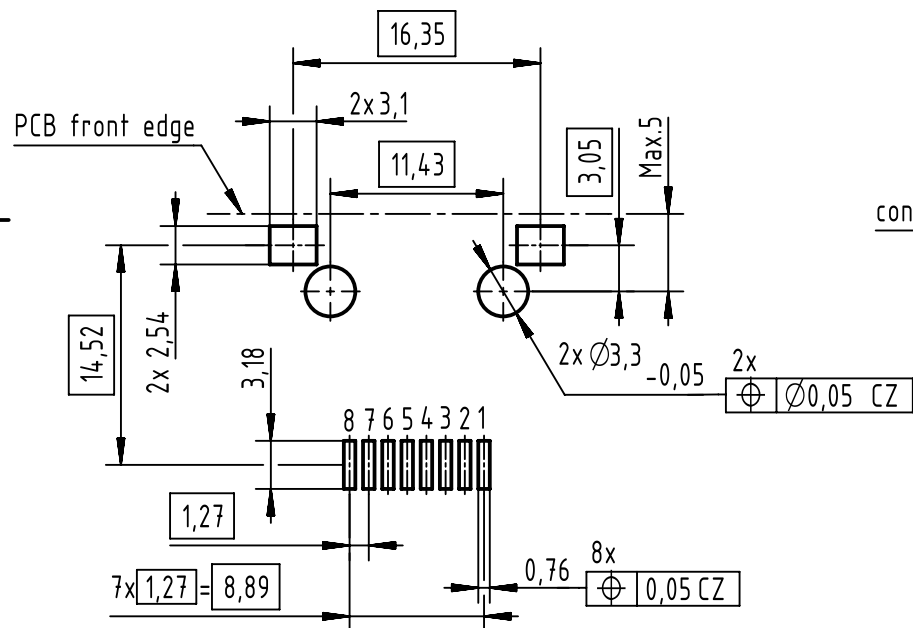

P/N	Qty per packaging
09 45 551 1100 333	1 pcs
09 45 551 1100	120 pcs (blister packaging)
09 45 551 1110	130 pcs (tape and reel packaging)

		All Dimensions in mm Original Size DIN A4		Scale 2:1		Free size tol.		Ref.					
								Sub.					
		All rights reserved		Created by PREOTU		Inspected by PRIESTER		Standardisation HOFFMANN		Date 2020-03-03		State Final Release	
		Department EL PD											
		HARTING Electronics GmbH D-32339 Espelkamp		Title RJ45 jack Cat.5 SMT angled								Doc-Key / ECM-Nr. 100850401/UGD/000/C 500000167756	
				Type TB		Number 09455511100						Rev. C	