



CONFIDENTIAL

VERTRAULICH

THIS DRAWING IS THE EXCLUSIVE PROPERTY OF MARQUARDT. WITHOUT THEIR CONSENT IT MAY NOT BE REPRODUCED OR GIVEN TO THIRD PARTIES.

Alle Rechte bei Marquardt, auch fuer den Fall von Schutzrechtsanmeldungen. Jede Veruegungsbefugnis, wie Kopier- und Weitergaberecht, bei uns.

A	recommended cut-out for snap-in fixing (edge opposite to snap-in direction)	1	2	3	4
			wall thickness	length of cut-out	width of cut-out
			0.75 to 1.25	19.2 -0.1	12.9+0.1
			1.25 to 2	19.4 -0.1	12.9+0.1
		2 to 3	19.8 -0.1	12.9+0.1	

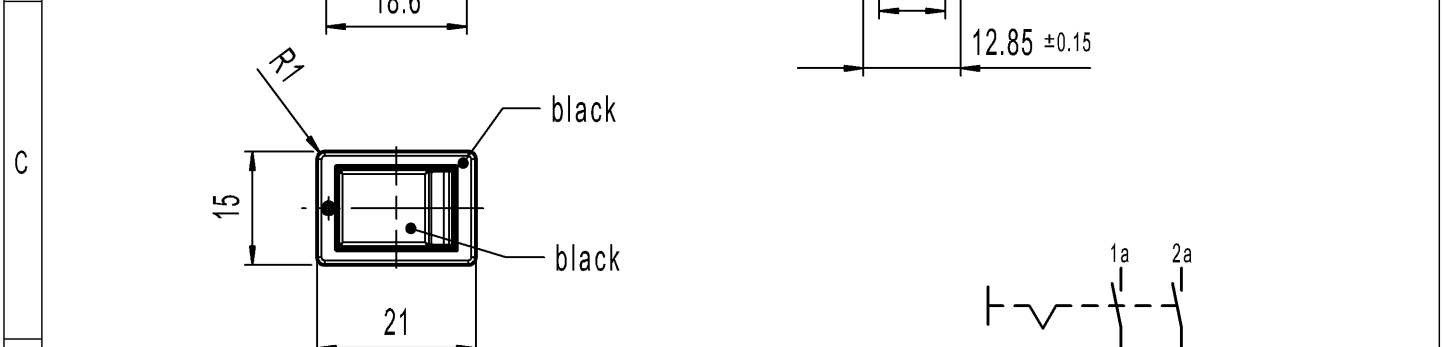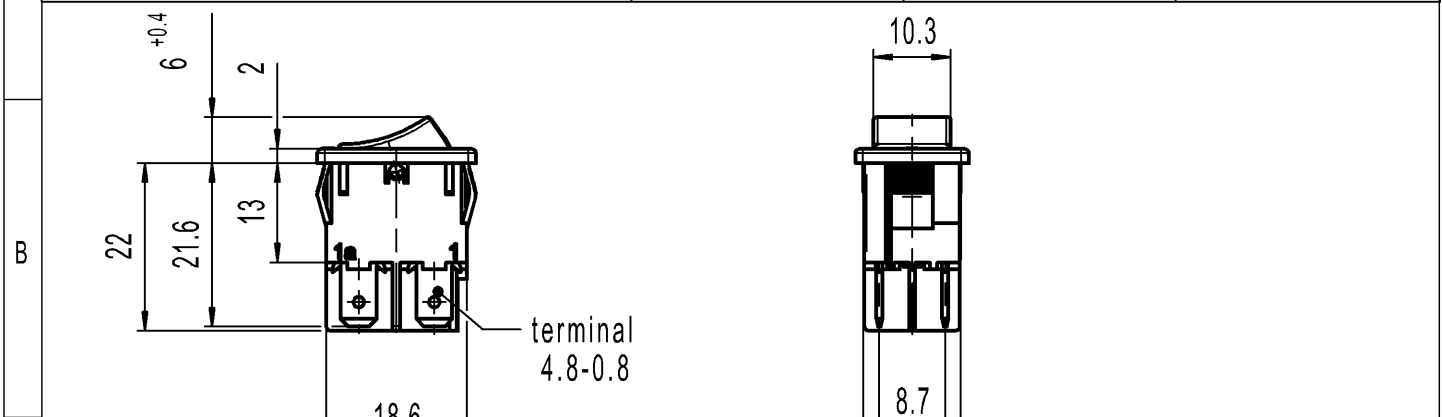

Marking
 Ⓜ
 1858.
 6(4)/250~5E4
 10(4)/250 ~ T100/55
 5/100A 250V ~

DPST
 Suitable for appliance of class II
 Protected according to DIN 40 050, IP40
 G= matching IEC 60335-1:2001 clause 30

12A 125-250V AC
 1/3 HP 125V AC
 1/2 HP 250V AC
 R138

Code of manufacture: place/year/week
 On box: G

-	-	-	1858.1102-XX
Figure	Type	Customer Part No.	Art.No.-PI
Shape and location	Angle ± 2°	Sheet 01	Ident. K
	Edge tolerance	Format DIN A4	Document number 18581102
⊙ ≡		Projection	Index k
		Scale 1:1	Appliance Switch
All dimensions are in millimetres		MARQUARDT	
k	141198	2022-01-03	MOHITEN
j	47886	2006-06-23	MUT
i	41634	2004-12-03	BRC
h	36320	2003-06-02	VOR
Index	MEC-No.	Date (YYYY-MM-DD)	Edited by
System NX V1872		Replacement of	
Zg.gl.Nr.v.18.02.1994			