

power splitter - PS3-F1300 - fixed

Product Information



The introduction of DKT PS3-F1300 is our most recent addition to the highly successful series of DKT's power splitters serving networks all over Europe. The frequency range has now been enhanced to meet Dccsis 3.1 requirements.

With the DKT PS3-F1300 we have focused on designing the most compact and flexible 2-way splitter/directional coupler on the market fitting applications in Europe using street cabinets and underground cables. The compact size makes installation in even small street cabinets possible.

The electrical performance is in compliance with CENELEC's highest standards just as in the case with the other DKT products.

PS3-F1300 - fixed is produced to below specifications and as shown in the diagram to the right.

All Power Splitter models have spring-loaded terminals mounted on the PCB. So the PG11 adapter can be installed without dismounting the power splitter lid.

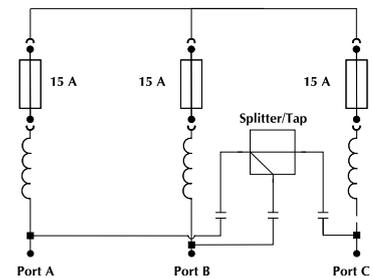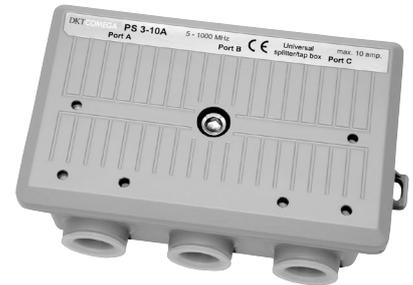

3-port Power Splitter

Type	Frequency Range	PS3-F1300-02	PS3-F1300-1-7	PS3-F1300-1-11	PS3-F1300-1-16
Description		2-way splitter	1-way tap 7dB	1-way tap 11dB	1-way tap 16dB
Item no.		40621	40622	40623	40624
Insertion Loss (IN-OUT) (dB)	5 - 470 MHz	4.0 ± 0.7	3.0 ± 0.7	1.6 ± 0.6	1.1 ± 0.6
	470 - 1006 MHz	4.1 ± 0.8	3.3 ± 0.8	1.7 ± 0.8	1.2 ± 0.7
	1006 - 1300 MHz	4.7 ± 1.0	4.3 ± 1.0	2.9 ± 0.9	2.1 ± 0.8
Tap Loss (IN-TAP) (dB)	5 - 1300 MHz	-	7.8 ± 1.3	10.5 ± 1.0	16.5 ± 1.0
Isolation (OUT-TAP) (dB)	5 - 10 MHz	≥ 20	≥ 21	≥ 23	≥ 25
	10 - 470 MHz	≥ 25	≥ 22	≥ 23	≥ 24
	470 - 1006 MHz	≥ 21	≥ 20	≥ 21	≥ 23
	1006 - 1300 MHz	≥ 20	≥ 20	≥ 20	≥ 22
Return Loss (dB)	5 - 10 MHz	≥ 16			
	10 - 1300 MHz	Grade 2 ¹			
Housing		Aluminium with anti corrosive painting			
Connectors		PG11 female - optional 5/8" - spring loaded clamp			
Power Passing		Max. 10A			
Hum Modulation (64V, 6A)		< - 70 dB			
Group Delay (Δf 2 MHz)	7 - 10 MHz	< 12 ns			
	10 - 25 MHz	< 3 ns			
	25 - 1300 MHz	< 1.5 ns			
Screening Effectiveness		Class A ²			
Operating Temperature		-20 to +60 °C			
Dimensions (mm)		150 x 90 x 55			
Weight (kg)		0.5			

¹ Return Loss: EN60728-4 Grade 2
10-47 MHz ≥ 18 dB
47-1300 MHz min. 18 dB ÷ 1.5/oct.

² Screening Effectiveness: EN60728-2 Class A
5-300 MHz ≥ 85 dB, 300-470 MHz ≥ 80 dB
470-950 MHz ≥ 75 dB, 950-1300 MHz ≥ 65 dB

power splitter - PS3-F1300 - flexible

Product Information



The introduction of DKT PS3-F1300 is our most recent addition to the highly successful series of DKT's power splitters serving networks all over Europe. The frequency range has now been enhanced to meet Dccsis 3.1 requirements.

With the DKT PS3-F1300 we have focused on designing the most compact unit with a flexible choice for the specific network setup and to save inventory costs. Additionally, it can be used as a platform for power insertion through placement of bridge plug-in modules. The compact size makes installation in even small street cabinets possible.

The electrical performance is in compliance with CENELEC's highest standards just as in the case with the other DKT products.

PS3-F1300 - flexible is produced to below specifications and as shown in the diagram to the right.

All Power Splitter models have spring-loaded terminals mounted on the PCB. So the PG11 adapter can be installed without dismounting the power splitter lid.

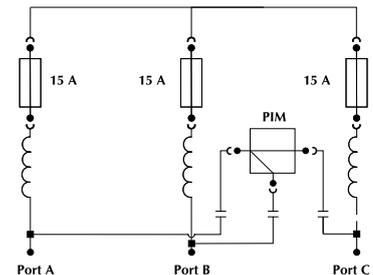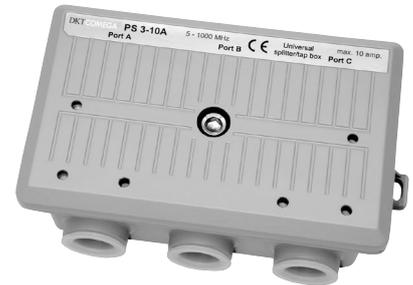

Type	Plug-in modules	Item no.	Port A	Port B	Port C
Bridge (dB)	PIM 0A 1G3	40530	In	0.7 ± 0.5	AC in
	PIM 0B 1G3	40531	In	AC in	0.7 ± 0.5
	PIM 0C 1G3	40532	AC in	In	0.7 ± 0.5
Splitter (dB)	PIM 4 1G3	40533	In	4.0 ± 1.5	4.0 ± 1.5
Tap (dB)	PIM 1-7 1G3	40534	In	7.5 ± 1.5	2.9 ± 1.0
	PIM 1-10 1G3	40535	In	10.5 ± 1.5	2.3 ± 1.0
	PIM 1-13 1G3	40536	In	13.2 ± 1.5	1.8 ± 1.0
	PIM 1-16 1G3	40537	In	16.5 ± 1.5	1.3 ± 1.0
	PIM 1-19 1G3	40538	In	19.1 ± 1.5	1.3 ± 0.8
	PIM 1-22 1G3	40539	In	22.0 ± 1.5	1.3 ± 0.8
	PIM 1-26 1G3	40544	In	26.0 ± 1.5	1.3 ± 0.8
Frequency range (MHz)	5-1300				
Return loss (dB)	5 - 10 MHz			≥ 16	
	10 - 1300 MHz			Grade 2 ¹	
Connectors	PG11 thread - optional 5/8" - optional 5/8"				
Power pass	Max. 10 A				
Hum modulation (64 V, 6 A)	< - 70 dB				
Screening effectiveness	Class A ²				
Dimensions (mm)	150 x 90 x 55				
Weight (Kg)	0.5				


¹ Return Loss: EN60728-4 Grade 2
10-47 MHz ≥ 18 dB
47-1300 MHz min. 18 dB ÷ 1.5/oct.

² Screening Effectiveness:
EN60728-2 Class A
5-300 MHz ≥ 85 dB, 300-470 MHz ≥ 80 dB
470-950 MHz ≥ 75 dB, 950-1300 MHz ≥ 65 dB

power splitter - PS5-F1300-fixed

Product Information

The introduction of DKT PS5-F1300 is our most recent addition to the highly successful series of DKT's power splitters serving networks all over Europe. The frequency range has now been enhanced to meet Docsis 3.1 requirements.

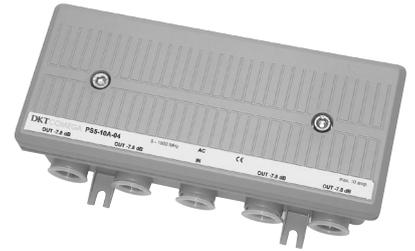

With the DKT PS5-F1300 we have focused on designing the most compact and flexible 2-way splitter/directional coupler on the market fitting applications in Europe using street cabinets and underground cables. The compact size makes installation in even small street cabinets possible.

The electrical performance is in compliance with CENELEC's highest standards just as in the case with the other DKT products.

PS5-F1300 - fixed is produced to below specifications and as shown in the diagram to the right.


All Power Splitter models have spring-loaded terminals mounted on the PCB. So the PG11 adapter can be installed without dismantling the power splitter lid.

5-Port Power Splitter

Type	Frequency Range	PS5-F1300-03	PS5-F1300-03A	PS5-F1300-04	PS5-1300-2-12
Description		3-way splitter	3-way splitter asym.	4-way splitter	2-way tap 12dB
Item no.		40630	40631	40632	40633
Insertion Loss (IN-OUT) (dB)	5 - 470 MHz	6.0 ± 0.7	4.2 ± 0.7 / 7.3 ± 0.7	7.5 ± 0.7	2.1 ± 0.6
	470 - 1000 MHz	6.3 ± 1.0	4.2 ± 1.0 / 7.7 ± 1.0	7.8 ± 1.0	2.3 ± 0.7
	1000 - 1300 MHz	7.2 ± 1.0	4.5 ± 1.0 / 8.5 ± 1.0	8.7 ± 1.0	3.0 ± 0.8
Tap Loss (IN-TAP) (dB)	5 - 1300 MHz	-	-	-	12.4 ± 1.0
Isolation (OUT-OUT) (dB)	5 - 10 MHz	≥ 20	≥ 22	≥ 22	≥ 20 / 27
	10 - 470 MHz	≥ 25	≥ 22	≥ 25	≥ 25 / 32
	470 - 1000 MHz	≥ 21	≥ 21	≥ 21	≥ 21 / 25
	1000 - 1300 MHz	≥ 20	≥ 20	≥ 20	≥ 20 / 22
Return Loss (dB)	5 - 10 MHz	≥ 16			
	10 - 1300 MHz	Grade 2 ¹			
Housing		Aluminium with anti corrosive painting			
Connectors		PG11 female - optional 5/8"- spring loaded clamp			
Power Passing		Max. 10A			
Hum Modulation (64V, 6A)		< - 70 dB			
Group Delay (Δf 2 MHz)	7 - 10 MHz	< 12 ns			
	10 - 25 MHz	< 3 ns			
	25 - 1300 MHz	< 1.5 ns			
Screening Effectiveness		Class A ²			
Operating Temperature		-20 to +60 °C			
Dimensions (mm)		209 x 96 x 56			
Weight (kg)		0.7			

¹ Return Loss: EN60728-4 Grade 2
 10-47 MHz ≥ 18 dB
 47-1300 MHz min. 18 dB ÷ 1.5/oct. and min. 14dB

² Screening Effectiveness:
 EN60728-2 Class A
 5-300 MHz ≥ 85 dB, 300-470 MHz ≥ 80 dB
 470-950 MHz ≥ 75 dB, 950-1300 MHz ≥ 65 dB

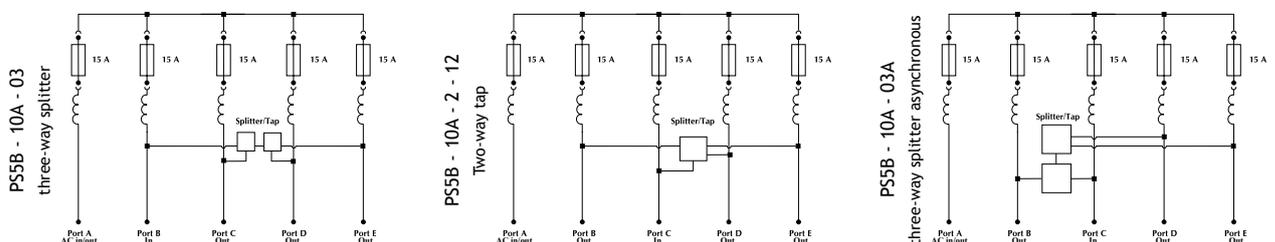

confree - two-way splitter with trunk or ac feed

Product information


The introduction of DKT ACP3 P1 F1300 is our most recent addition to the highly successful series of DKT's power splitters serving networks all over Europe. The frequency range has now been enhanced to meet Docsis 3.1 requirements.

With the DKT ACP3 P1 F1300 we have focused on designing the most compact unit with a flexible choice for the specific network setup and to save inventory costs. Additionally, it can be used as a platform for power insertion through placement of bridge plug-in modules. The compact size makes installation in even small street cabinets possible.

The electrical performance is in compliance with CENELEC's highest standards just as in the case with the other DKT products.

ACP3 P1 F1300 Item no. 41651

PIM type	Item no	Unit	Out 1	Out 2
PIM 0A 1G3	40530	(dB)	0.6 ± 1.0	-
PIM 0B 1G3	40531	(dB)	-	0.6 ± 1.0
PIM 4 1G3	40533	(dB)	4.7 ± 1.0	4.7 ± 1.0
PIM 1-7 1G3	40534	(dB)	7.9 ± 1.5	2.9 ± 1.0
PIM 1-10 1G3	40535	(dB)	10.9 ± 1.5	2.4 ± 1.0
PIM 1-13 1G3	40536	(dB)	13.4 ± 1.5	1.7 ± 1.0
PIM 1-16 1G3	40537	(dB)	15.9 ± 1.5	1.4 ± 1.0
PIM 1-19 1G3	40538	(dB)	18.9 ± 1.5	1.3 ± 1.0
PIM 1-22 1G3	40539	(dB)	22.0 ± 1.5	1.3 ± 1.0
PIM 1-26 1G3	40544	(dB)	26.0 ± 1.5	1.3 ± 1.0
Frequency range	(MHz)		5-1218	
Return loss	(dB)		5 - 10 MHz	≥ 16
			10 - 1300 MHz	Grade 2 ¹
Connector		PG11 thread - optional 5/8" or cable shells		
Power pass		Max 10 A		
Screening effectiveness		Class A ²		
Hum modulation (64 V, 6 A)		< - 70 dB		
Dimensions	(mm)	154 x 107 x 55		
Weight	(kg)	0.8		

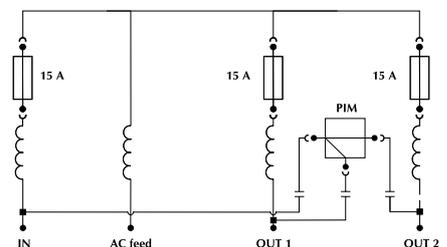


ACP4 P2 Item no. 41604

PIM type	Item no	Unit	Out 1	Out 2	Trunk output
PIM 4 + PIM 4	40533/40533	(dB)	4 ± 1.0	8 ± 1.0	8 ± 0.5
PIM 1-7 + PIM 4	40534/40533	(dB)	7.5 ± 1.0	6.5 ± 1.0	6.5 ± 0.5
PIM 1-10 + PIM 1-7	40535/40534	(dB)	11 ± 1.0	9 ± 1.0	4 ± 0.5
PIM 1-13 + PIM 1-13	40536/40536	(dB)	13.5 ± 1.0	14.5 ± 1.0	3 ± 0.5
PIM 1-16 + PIM 1-16	40537/40537	(dB)	16 ± 1.0	17 ± 1.0	2.2 ± 0.5
PIM 1-19 + PIM 1-19	40538/40538	(dB)	19 ± 1.0	19.5 ± 1.0	2 ± 0.5
Frequency range	(MHz)		5-1006		

¹ Return Loss: EN60728-4 Grade 2
10-47 MHz ≥ 18 dB
47-1300 MHz min. 18 dB ÷ 1.5/oct. and min. 14dB

² Screening Effectiveness:
EN60728-2 Class A
5-300 MHz ≥ 85 dB, 300-470 MHz ≥ 80 dB
470-950 MHz ≥ 75 dB, 950-1300 MHz ≥ 65 dB

Connector	PG11 thread - optional 5/8" or cable shells		
Power pass	Max 10 A		
Hum modulation (64 V, 6 A)	< - 70 dB		
Dimensions	(mm)	154 x 107 x 55	
Weight	(kg)	0.8	

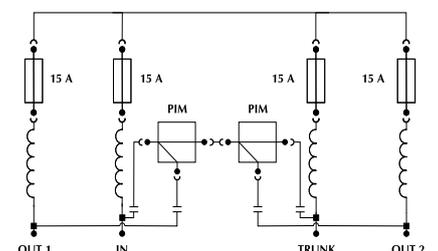

accessories

Product information

DKT offers a wide range of connectors and adapters for the Power Splitter and ConFree series. These provide fast and easy installation without compromising the the very high quality, and this by ensuring a low insertion loss.

Data	Common to all PG11M adaptors (Where applicable)
Insertion loss (dB)	≤ 0.1
Return loss	≥ Grade 1 ¹
Screening efficiency	Class A ²
Material	Brass
Plating	Nickel-tin
Center conductor	Phosphor bronze or Beryllium copper
Center conductor plating	Nickle-tin

¹ Return loss: CENELEC EN60728-4 Grade 1
5-47 MHz ≥ 22 dB, 47-1006 MHz ≥ 22 dB ÷ 1.5 dB/oct. min. 14 dB

² Screening effectiveness:
CENELEC 50083-2 Class A
5-300 MHz ≥ 85 dB, 300-470 MHz ≥ 80 dB
470-950 MHz ≥ 75 dB, 950-1006 MHz ≥ 65 dB



PG11M-ACF-2 Item no.: 81903

Used to feed AC power, with cuttable pin for the right fit.



PG11M-5/8" F Item no.: 87049

Reduction ring, transforms PG11 socket into 5/8" socket.

Power Splitter

ConFree

Description



PG11M-FF Item no.: 87100



PG11MEX-FF Item no.: 87150

Adaptor from PG11 into F-female, with cuttable pin for the correct fit, MEX connectors are not cuttable.



PG11M-IECF Item no.: 87102



PG11MEX-IECF Item no.: 87151

Adaptor from PG11 into IEC14-female, with cuttable pin for the correct fit, MEX connectors are not cuttable.



PG11M-3,5/12F Item no.: 87110



PG11MEX-3,5/12F Item no.: 87152

Adaptor from PG11 into 3,5/12-female, with cuttable pin for the correct fit, MEX connectors are not cuttable.