

DVR RUSH



Rush supports plug-and-play installation and provides everyday protection for home or business environments. Users can receive clear videos and images captured by their system through mobile devices and PC networks.




Features :


- Multiple simultaneous operations.
- 3G mobile and PC access.
- Off-site monitoring and email notification.
- H.264 video compression.
- Real-time recording and live viewing in high resolution.
- Easy-to-use interface.
- Quick backup to USB device.



3G Mobile Viewing

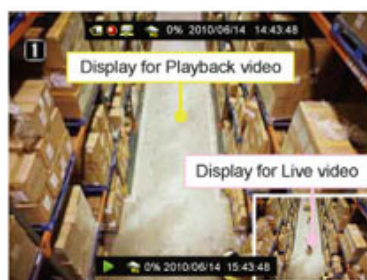

▶▶ Picture-in-Picture display for Live/Playback

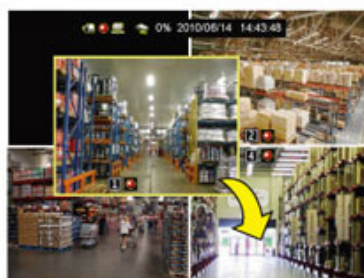

▶▶ Soft Channel Swap via mouse drag-and-drop



▶▶ MVS (Multi Viewer System)



▶▶ PC Player and IE Viewer for remote control

Specifications:

MODEL	DVR RUSH		
	4Ch	8Ch	16Ch
Video			
System	NTSC/PAL (Auto Detection)		
Compression	H.264		
Input	BNC x 4, Cat5 (RJ45 x 4) Optional	BNC x 8, Cat5 (RJ45 x 8) Optional	16 x 8BNC (D-SUB 8Port)
Output	Video Out(RCA) x 1, VGA x 1		Video Out(RCA) x 1, VGA x 1, Spot x 1
Display Frame Rate	120/100 fps	240/200 fps	480/400 fps
Display Resolution	720 x 480 / 720 x 576 (NTSC / PAL), VGA: 1280 x 1024		
Display Mode	1 / 4 / Sequence / PIP	1 / 4 / 1+5 / 1+7 / 9 / Sequence / PIP	1 / 4 / 1+5 / 1+7 / 9 / 1+12 / 1+15 / 16 / Sequence / PIP

Audio			
Audio In / Out	1 / 1		
RECORDING / PLAYBACK			
Recording Resolution (NTSC / PAL)	D1: 720x480 / 720x576, Half D1: 720x240 / 720x288, CIF: 360x240 / 360x288		
Recording Rate (NTSC / PAL)	D1: 60 / 50 fps Half D1:120 / 100 fps CIF: 120 / 100 fps	D1: 60 / 50 fps Half D1:120 / 100 fps CIF: 240 / 200 fps	D1: 120 / 100 fps Half D1:240 / 200fps CIF: 480 / 400 fps
Recording Mode	Time (Continuous) / Motion Detection / Sensor / Motion & Sensor		
Playback	Search by Time / Event / Calendar		
SENSOR / ALARM			
Sensor / Alarm	4 / 1(Optional)		YES (optional)
STORAGE / BACKUP			
Storage Support	SATA HDD x 1		
Backup Device	USB Stick		
CONNECTOR			
USB	USB 2.0 Port x 1		
Mouse	USB Mouse Port x 1		
IR Extender	IR Jack and Cable (Optional)		
OSD / CONTROL			
GUI / Control Interface	YES / Mouse, Keypad, IR Remote Controller(Optional)		
Multilingual Menu	YES		
Access Authentication	YES		
PIP	YES, ON/OFF		
Channel Swap	Yes, via Mouse Drag-and-Drop		
PTZ control	Yes, RS485, Via Mouse or Keyboard		
Firmware Upgrade	USB / Network		
NETWORK			
Network	10/100 Ethernet (RJ-45)		
Network Protocol	TCP/IP, Static IP, DHCP, PPPoE(ADSL), DDNS		
Network Remote	Client Program and IE Browser		
Multilingual OSD	YES		
3G Mobile Viewing	YES		
E-mail Notification	YES		
OTHER INFO			
Power Supply	Input: AC100~240V 50/60Hz, Output: DC12V		
Operating Temperature	5°C~45°C		
Dimension (WxHxD cm)	21.4 x 4.4 x 23.7 cm		