

SB Boxes Shrink-Kon® - Thin wall heat shrink tubing

Characteristics

SB heat shrink tubing in a compact, handy sized neutral box used for electrical maintenance and repair


- Convenient amount of heat shrink, for small users
- Offered in 10 sizes to cover a heat shrink range from Ø 1.2 mm to Ø 25.4 mm
- Stackable boxes for easy storage
- Flexible, rapid shrinkage, non-melting for effective electrical insulation
- Flame retardant
- Colour: Black

Technical Information

Wall thickness	Thin
Shrink ratio	2:1
Tube characteristics	Single wall
Temperature range	-55°C to +125°C
Shrinking temperature	+110°C
Material	Crosslinked polyolefin
IP rating	IP60
Other properties	Silicone, Cadmium and Lead free

Product Ref.	Expanded diameter D		Fully recovered diameter [mm]	Wall thickness before shrinking [mm]	Wall thickness after shrinking [mm]	Length per box [m]
	[inch]	[mm]				
SB12	3/64	1.2	0.6	0.20	0.4	12.0
SB16	1/16	1.6	0.8	0.20	0.4	12.0
SB24	3/32	2.4	1.2	0.25	0.5	11.5
SB32	1/8	3.2	1.6	0.25	0.5	11.5
SB48	3/16	4.7	2.4	0.25	0.5	9.5
SB64	1/4	6.4	3.2	0.30	0.6	7.5
SB95	3/8	9.5	4.7	0.30	0.6	6.5
SB127	1/2	12.7	6.4	0.30	0.7	6.0
SB190	3/4	19.0	9.5	0.40	0.7	5.0
SB254	1	25.4	12.7	0.45	0.8	3.3

2:1

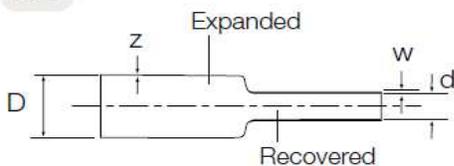

For further technical assistance, please contact us

Customer Service : Tel +32 (0)64 88 63 88