


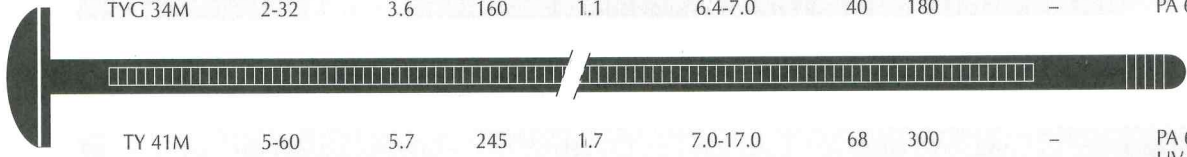






TECHNISCHE INFORMATIONEN

PRODUKT Nr.	BÜNDEL-DURCHMESSER VON ... BIS [mm]	BREITE [mm]	LÄNGE [mm]	MATERIAL-STÄRKE [mm]	DURCHMESSER DER BEFESTIGUNGS-BOHRUNG [mm]	MINDESTZUG-FESTIGKEIT [lbs] [N]		FÜR FOLGENDE WANDSTÄRKEN GEEIGNET [mm]	MATERIAL
	TY 54SM 2-32 TY 38M 3.5-45	3.5 4.8	150 201	1.0 1.1	4.5-5.2 5.8-7.5	30 50	134 220	bis zu 2.5 2.2-3.7	PA 6.6* PA 6.6*
	696-41836 3.5-45	4.8	197	1.1	5.8-7.5	50	220	2.2-3.7	PA 6.6*
	TYG 34M 2-32	3.6	160	1.1	6.4-7.0	40	180	-	PA 6.6*
	TY 41M 5-60	5.7	245	1.7	7.0-17.0	68	300	-	PA 6.6 UV- beständig
	TY 844MX 3.5-45	4.8	198	1.1	4.8	50	220	min. 25	PA 6.6 UV- beständig
	TY 545MX 3.5-45	4.8	198	1.1	-	50	220	-	PA 6.6 UV- beständig
	TYR 505 10-45	4.8	190	1.25	-	50	220	-	PA 6.6
	TYR 508 10-102	4.8	364	1.25	-	50	220	-	PA 6.6

*Standardmaterial aus Polyamid 6.6 – für UV-beständiges Material fügen Sie ein „X“ an die Produkt Nr. (z. B.: TY...MX).